



Project _____

Item No. _____

Quantity _____

THE i5



PERFORMANCE

- The i5 is the state-of-the-art oven that combines speed, versatility, and throughput. Due to the top-launched microwave system and large cavity size, the i5 is fully compatible with all standard metal pans up to a 6"-deep full size hotel pan.

EXTERIOR CONSTRUCTION

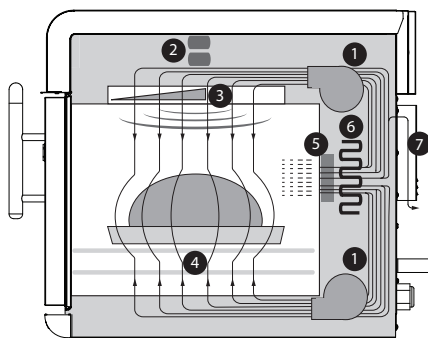
- Two-tone stainless steel front, top and sides
- 304 stainless steel removable grease collection pan
- Ergonomic door handle
- Rubber seal for surface mounting
- Side handles for lifting

INTERIOR CONSTRUCTION

- 304 stainless steel interior
- Fully insulated cook chamber
- Removable rack with dual setting option
- Top and bottom jetplates

STANDARD FEATURES

- Integral recirculating catalytic converter
- Independently-controlled dual motors for vertically-recirculated air impingement
- Top-launched microwave system
- Stirrer to help ensure even air and microwave distribution
- Variable rack positioning
- External air filtration
- Smart menu system capable of storing up to 200 recipes
- Flash software updates via smart card
- Single or multiple-temperature interface
- Smart Voltage Sensor Technology* (U.S. only)
- Vent catalyst to further limit emissions
- Built-in self-diagnostics for monitoring oven components and performance
- Field-configurable for single or 3-phase operation†
- Warranty – 1 year parts and labor



1. Blower Motors
2. Microwave System
3. Stirred Impinged Air (Top) and Microwave
4. Impinged Air (Bottom)
5. Catalytic Converter
6. Impingement Heater
7. Vent Tube Catalyst



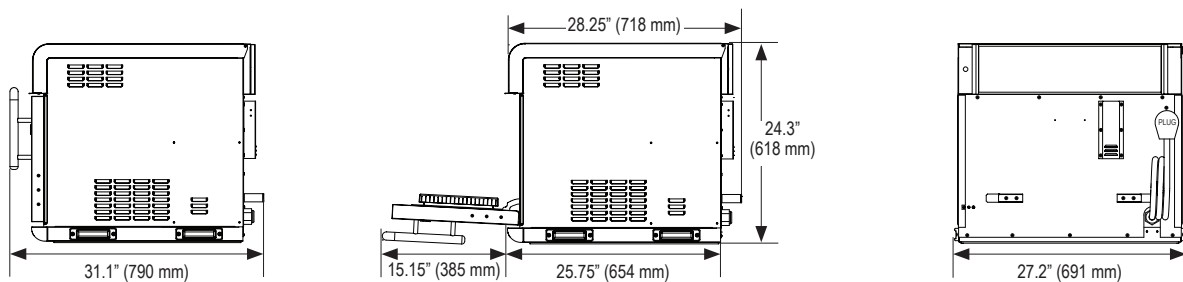
*Smart Voltage Sensor Technology does not compensate for lack of or over voltage situations. It is the responsibility of the owner to supply voltage to the unit according to the specifications on the back of this sheet.






†EU ovens only







This product conforms to the ventilation recommendations set forth by NFPA96 using EPA202 test method. Call to request ventless certification information.

TurboChef reserves the right to make substitutions of components or change specifications without prior notice.

TurboChef Global Operations
 4240 International Pkwy, Suite 105
 Carrollton, Texas 75007 USA
 US: 800.90TURBO (800.908.8726)
 International: +1 214.379.6000
 Fax: +1 214.379.6073
 turbochef.com



DIMENSIONS		
Single Units		
Height	24.3"	(618 mm)
Width	27.2"	(691 mm)
Depth	28.25"	(718 mm)
Weight	275 lbs.	(125 kg)
Cook Chamber		
Height	10"	(254 mm)
Width	24"	(610 mm)
Depth	16"	(406 mm)
Volume	2.2 cu.ft.	(62 liters)
Wall Clearance (Oven not intended for built-in installation)		
Top	16"	(406 mm)
Sides	2"	(51 mm)
ELECTRICAL SPECIFICATIONS-SINGLE PHASE		
i5 US Model (I5-9500-1)		
Voltage	208/240 VAC	
Frequency	60 Hz	
Current	46 amps	
Plug	NEMA 6-50P	
Max Input	9500/11500 watts	
i5 UK Model (I5-9500-2-UK)		
Voltage	230 VAC	
Frequency	50 Hz	
Current	48 amps	
Plug	IEC 309, 3-pin	
Max Input	10000 watts	
i5 BK Model (I5-9500-6-BK)		
Voltage	220 VAC	
Frequency	60 Hz	
Current	48 amps	
Plug	IEC 309, 3-pin	
Max Input	10000 watts	
i5 LA Model (I5-9500-7-LA)		
Voltage	220 VAC	
Frequency	60 Hz	
Current	48 amps	
Plug	NEMA 6-50P	
Max Input	10000 watts	
i5 JK Model - 50 Hz (I5-9500-8-JK) 60 Hz (I5-9500-10-JK)		
Voltage	200 VAC	
Frequency	50/60 Hz	
Current	46 amps	
Plug	NEMA L6-50, PSE, 3-blade	
Max Input	9000 watts	

ELECTRICAL SPECIFICATIONS-MULTI PHASE		
i5 EW Model (I5-9500-4-EW)		
Voltage	400 VAC	
Frequency	50 Hz	
Current	19 amps	
Plug	IEC-309, 5-pin	
Max Input	10000 watts	
i5 AU Model (I5-9500-5-AU)		
Voltage	400 VAC	
Frequency	50 Hz	
Current	19 amps	
Plug	Clipsal, 5-pin	
Max Input	10000 watts	
i5 ED Model (I5-9500-3-ED)		
Voltage	230 VAC	
Frequency	50 Hz	
Current	28 amps	
Plug	IEC 309, 4-pin	
Max Input	10000 watts	
i5 KW Model (I5-9500-12-KW)		
Voltage	400 VAC	
Frequency	60 Hz	
Current	19 amps	
Plug	IEC-309, 5-pin	
Max Input	10000 watts	
i5 JD Model - 50 Hz (I5-9500-9-JD) 60 Hz (I5-9500-11-JD)		
Voltage	200 VAC	
Frequency	50/60 Hz	
Current	25 amps	
Plug	NEMA L6-50, PSE, 4-blade	
Max Input	10000 watts	
i5 SD Model (I5-9500-13-SD)		
Voltage	230 VAC	
Frequency	60 Hz	
Current	28 amps	
Plug	IEC 309, 4-pin	
Max Input	10000 watts	
SHIPPING INFORMATION		
<p>U.S.: All ovens shipped within the U.S. are packaged in a double-wall corrugated box banded to a wooden skid.</p> <p>International: All International ovens shipped via Air or Less than Container Loads are packaged in wooden crates.</p>		
<p>Box size: 34.25" x 30.75" x 27.5" (870mm x 781mm x 699mm)</p> <p>Crate size: 36.5" x 32.5" x 31.5" (927mm x 826mm x 800mm)</p> <p>Item class: 85 NMFC #26770 HS code 8419.81</p>		
<p>Approximate crated weight: 325 lbs. (148 kg)</p>		
<p>Minimum entry clearance required for box: 27.5" (699mm)</p> <p>Minimum entry clearance required for crate: 31.5" (800mm)</p>		

** All i5 ovens can be field configured to allow single or 3 phase operation. TurboChef reserves the right to make substitutions of components or change specifications without prior notice.*